

OV12/OV16

FROM 1 to 3



DV12/DV16

FROM 1 to 3

Slat diverter

Main features



- Diverter/Aligner 1/3.
- AC motor controlled by inverter, speed up to 50 m/min.
- Working temperature: from 0 °C to + 40 °C.
- Power supply: 230 Vac (Hz 50/60).
- Maximum power: 1.50 kW.
- Structure and carpentry in aluminum and steel.
- Belt height from the ground: 850 +/- 50 mm.
- Machine management by PLC.

Possible applications

- Selection of output lines based on signals from checkweighers, metal detectors, barcode readers, vision systems.
- Balancing of the production flow on the downstream machines.
- Connection between production machines of different capacities.

Options

- Incoming cadance belts.
- Centralized adjustment of the distance between the rows (manual or automatic).

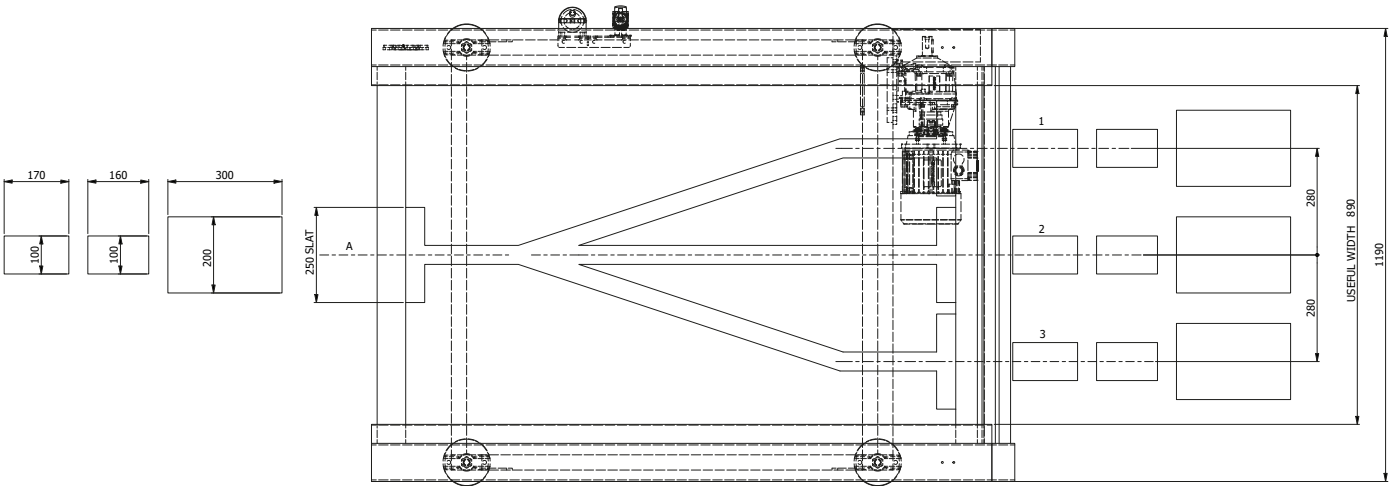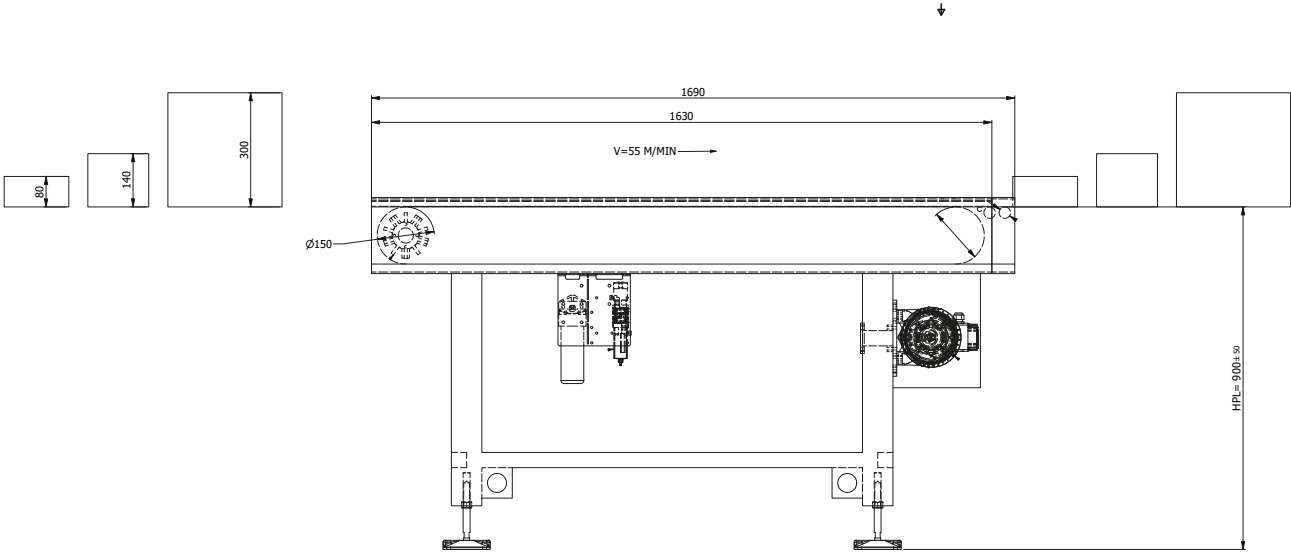

DV12/DV16

FROM 1 to 3

MODULAR AND INTEGRABLE

REDUCED MAINTENANCE COSTS

SELF-DIAGNOSTIC

CONNECTIVITY AND DATA SHARING WITH OTHER SOFTWARE

REMOTE ASSISTANCE



 TECHNOLOGY for Your Business

R.S. Bilance S.r.l.
Via Rinaudo, 19, Valcorrente - 95032 Belpasso CT
Tel. +39 095 352328a3
commerciale@rsbilance.com
www.rsbilance.com

